

EQUIPMENT NEWS



December 26, 2019

Making Planter Decisions for the New Year

Yetter Row Cleaners 2967-029

- Can be adjusted to float and follow the soil contour or locked down
- Standard mounting hole locations for Precision Planting CleanSweep®
- Compact design allows for mounting on planters with limited space
- Adjustable wheel position settings
- Mounts to row-unit faceplate
- Available with a range of residue management wheel options



Yetter Twister Closing Wheels

- Twisted poly spikes and rounded center
- Closes the disc opening in both wet and ideal conditions
- Ring design maintains wheel depth
- Available with full wheel assembly or as ring-only insert option
- Made with ultra-high molecular weight (UHMW) plastic material
- Enhances seed-to-soil contact and helps prevent yield-robbing air pockets
- Eliminates potential for sidewall compaction
- 16 teeth per wheel



Copperhead Ag Furrow Cruiser & Cruiser Inserts

- Optimized to clean out well, so when conditions are more saturated than ideal, the planter can keep running!
- The spacing and shape of the tooth is unique to the industry.

Precision Planting Planter Systems


DeltaForce



ADeltaForce replaces the springs or airbags on your current planter with hydraulic cylinders and load cells that measure how much weight is being carried on the row unit gauge wheels and keep it consistent. With DeltaForce, the hidden yield loss from compaction is eliminated, and each row is planting at the depth that was set.

vDrive

vDrive replaces the mechanical drive system, simplifying your planter. A vDrive motor mounts to each vSet meter and makes that row a single row planter, because that row is controlled individually.

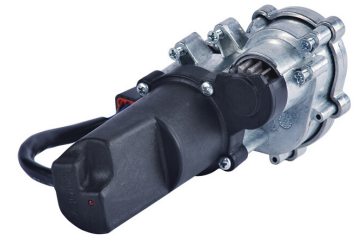

vDrive hits variable rates because each row can change population independently, rather than all rows planting the same population.

SpeedTube



SpeedTube uses two feeder wheels to pull seeds off of the vSet disk, into a flighted belt, and into the seed trench. The seeds don't bounce in the tube because they are under control, and they also don't tumble in the furrow because the seed release is matched to ground speed. The result is properly spaced seeds, and more acres covered in the ideal planting window.



**Contact us for Pricing and Information
on All Precision Planting Products
and Our Inventory of Used Planter Attachments**

Seed Tender Options



2 Box & 4 Box Seed Tenders
Electric Start, Wireless Remote,
Hydraulic Fold, Poly Auger
Option of Scale and Talc



Patriot Equipment



2 or 4 Box & 110 or 220 Unit Bulk Tenders
Electric Start, Manual Fold
Options of Scale, Talc, Wireless Remote, KSI Conveyor



2 or 4 Box & Bulk Tenders



Electric Start
Tarp
Conveyor



Options: Scale, Talc,
Wireless Remotes

Salford Spring Tillage



Standard Features:

- Tandem wheels on main frame and wings
- Adjustable tip pressure to 270 lbs on C-shank models
- Manual adjustable gauge wheels on primary wing only
- Category 3 hitch with bolt in adapter or Category 4 hitch
- Hydraulic self-leveling frame
- Single point hydraulic depth control
- Safety chain, SMV sign, safety lights

Options:

- “Land-hugger” floating frame with manual adjust caster wheels (available on 40’ models only)
- Adjustable tow hitch (one-man hook-up)
- Hydraulic lines and quick coupler to tow hitch

